


I-FLO

NOVIS
monitors


THE MOST BEAUTIFUL INDUSTRIAL MONITOR.

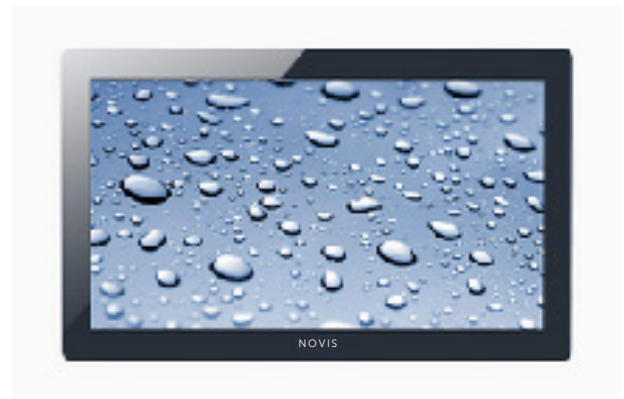


PRODUCT FEATURES.

- INDUSTRIAL MONITOR MADE OF GLASS AND ALUMINUM OR STAINLESS STEEL
- 30MM SLIM CASE
- DC WIDE RANGE INPUT 19-36 VOLTS ON REQUEST
- HIGHLY PRECISE MULTITOUCH, SPLASH-PROOF CAN ALSO BE OPERATED WITH GLOVES
- ABSOLUT PLANE FRONT AND REAR SIDE / ALSO SUITABLE FOR DISINFECTANTS
- PREPARED ON THE BACK FOR VESA AND INDUSTRIAL BRACKETS
- ENERGY EFFICIENT IPS LED PANEL WITH OUTSTANDING IMAGE QUALITY
- CONNECTION TO ANY GRAPHICS SYSTEM
- SUSTAINABLY AVAILABLE INDUSTRIAL QUALITY
- 36 MONTHS WARRANTY


INSTALLATION VARIANTS.

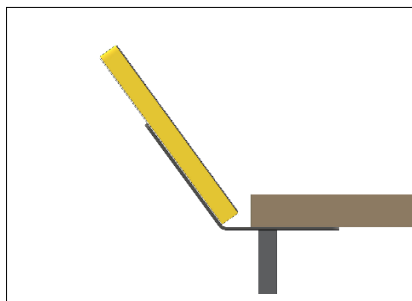


AT THE END OF THE TABLE

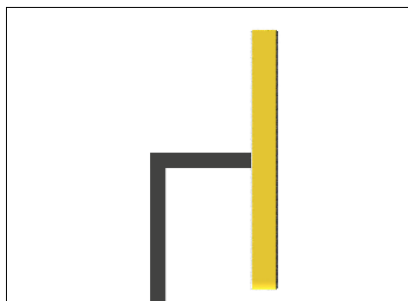


WITH ARM HOLDER

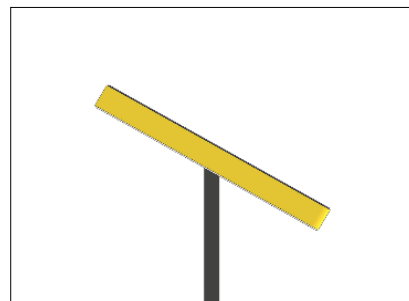


AS A STELE

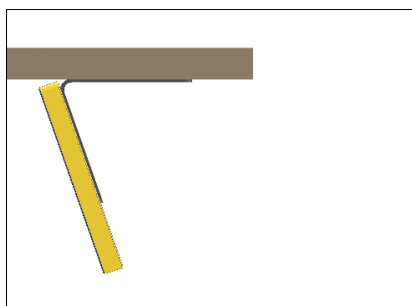

SLOPING CEILING

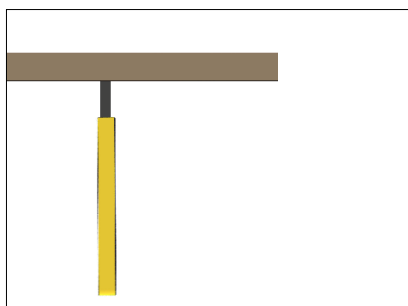

HANGING FROM THE
CEILING STRAIGHT

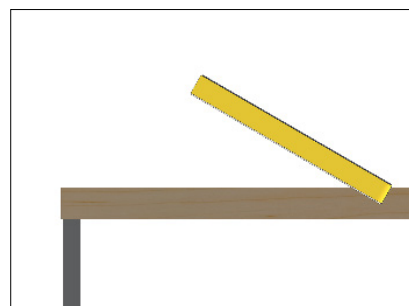

RECESSED IN A SMALL RECESS
AND SCREWED

AND MANY MORE POSSIBILITIES

SCREEN DIAGONAL.

42" (106,7 CM)

27" (68,6 CM)

21,5" (54,5 CM)

17,3" (43,8 CM)

STANDARD EQUIPMENT.

FRONT GLASS ESG
ANTI-REFLECTIVE
OPTIONAL:



BLACK (RAL 9005)



WHITE (RAL 9016)

ALL-ROUND FRAME AND
BACK IN ANODISED ALUMI-
NUM OR STAINLESS STEEL



ALUMINIUM

INDUSTRIAL PLANT



FOOD-
PRODUCTION



MACHINE CONTROL



AS WELL AS VARIOUS OTHER AREAS OF APPLICATION

TECHNICAL SPECIFICATIONS

I-FLO

SCREEN DIAGONAL	68,6 CM (27") WIDE, FULL HD IPS	54,5 CM (21,5") WIDE, FULL HD IPS	44 CM (17,3") WIDE, FULL HD IPS
DIMENSIONS LXWXH (MM)	650 X 400 X 30	550 X 350 X 30	450 X 308 X 30
DISPLAY TECHNOLOGY	IPS TECHNOLOGY WITH LED BACKLIGHT	IPS TECHNOLOGY WITH LED BACKLIGHT	IPS TECHNOLOGY WITH LED BACKLIGHT
RECOMMENDED RESOLUTION (PIXEL)	1920 X 1080	1920 X 1080	1920 X 1080
PICTURE FORMAT	16:9	16:9	16:9
IMAGE SIZE (MM)	597 X 334	510 X 287	475 X 268
LIGHT DENSITY (CD / M ²)	350	300	300
MAX. VIEWING ANGLE H / V (°)	178 / 178	178 / 178	178 / 178
CONTRAST	1000:1	1000:1	5000:1
SWITCHING TIME (MS))	10	10	8
COLORS (MILLIONS)	16,7	16,7	16,7
GRAPHIC INTERFACES	HDMI (ON DEMAND DVI, OR DP)		
POWER SUPPLY EXTERNAL	INPUT VOLTAGE 220-240 V, 50/60 HZ OUTPUT VOLTAGE 12 V		
POWER CONSUMPTION IN OPERATION (WATT)	20	22	20
WEIGHT APPROX. (KG)	8	7,5	7,5
OPERATING TEMPERATURE MIN /MAX (° C)	0 / +50	0 / +50	0 / +60
WARRANTY	36 MONTH ELECTRONICS / MECHANICS LIFE TIME WARRANTY		

