

LOFT MOUNT

NOVIS
monitors

BREATH TAKINGLY GREAT.

PRODUCT FEATURES.

- DIGITAL SIGNAGE PRESENTATION MONITOR WITH FLEXIBLE MOUNTING CHARACTERISTICS
- WALL OR CONSOLE INSTALLATION
- FLUSH-MOUNTED WALL / FLUSH-MOUNTED SOLUTION WITH BUILT-IN TUB
- WALL / CEILING HANGING WITH VESA MOUNTING STANDARD FOR UNIVERSAL FASTENING
- ABSOLUT PLANE FRONT SIDE MADE OF ESG PROTECTIVE GLASS
- SUITABLE FOR DISINFECTANTS
- BRILLIANT AND HIGH CONTRAST IMAGE WITH LARGE VIEWING ANGLE
- SUSTAINABLY AVAILABLE INDUSTRIAL QUALITY (OPERATION 24/7)
- INTERFACES FOR ALL GRAPHIC SYSTEMS
- FOR NETWORK AND BUILDING AUTOMATION
- 36 MONTHS WARRANTY

BUILDING AUTOMATION



CONSULTATION




DIGITAL SIGNAGE INFORMATION TERMINAL



AS WELL AS VARIOUS OTHER AREAS OF APPLICATION


INTEGRATED.

- ABSOLUTELY FLAT AND FLUSH
- EASY MAINTENANCE

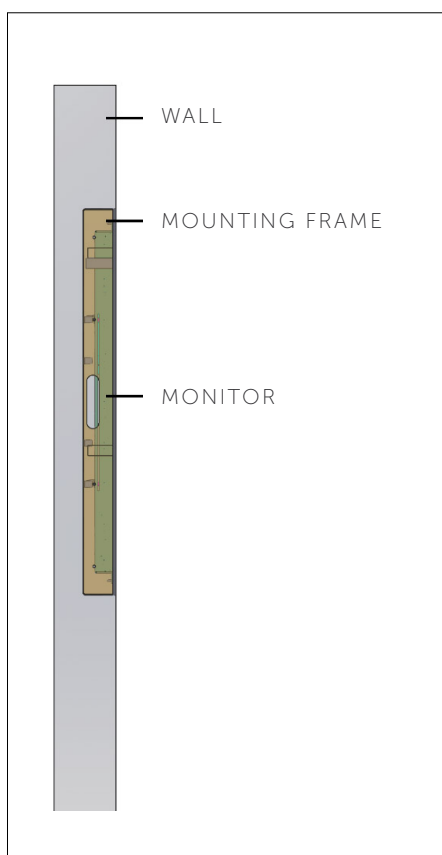

BRACKET.

- VARIOUS VESA MOUNTING STANDARDS
- NUMEROUS MOUNTING OPTIONS

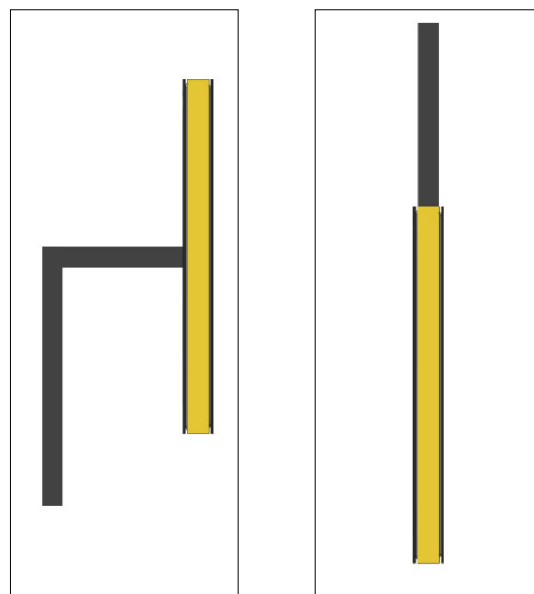

AND MANY MORE...

SCREEN DIAGONAL.

65" (165,1 CM)

55" (138,7 CM)

42" (106,7 CM)

27" (68,6 CM)

23" (58,4 CM)


21,5" (54,5 CM)

STANDARD EQUIPMENT.

- FRONT SIDE
OPTIONAL :



BLACK (RAL 9005)



WHITE (RAL 9016)

- ALL-ROUND STRIP FRAME IN NATURAL
POLISHED ALUMINUM



- BUILT-IN BATHTUB IN BLACK WITH INTEGRATED VIBRATION DECOUPLING
- FIXED CABLE FOR HDMI VIDEO SIGNAL TRANSMISSION AND POWER SUPPLY,
LENGTH APPROX. 2.5 M
- VARIOUS VESA STANDARDS

EVEN MORE OPTIONS...

- OPTIONAL MULTI-TOUCH SYSTEM WITH TABLET FEELING INTEGRATED IN THE FRONT GLASS
- COLOR NEUTRAL, HIGHLY EFFECTIVE REFLECTION
- LIGHT INTENSITY OVER 1500 CD / M² (DAYLIGHT SUITABLE, AUTOMATIC DIMMING)
- CONNECTION VARIANTS: DISPLAYPORT (DP), DVI, LAN / WLAN, KNX / EIB

TECHNICAL SPECIFICATIONS

LOFT MOUNT

SCREEN DIAGONAL	165,1 CM (65") WIDE, FULL HD IPS	138,7 CM (55") WIDE, FULL HD IPS	106,7 CM (42") WIDE, FULL HD IPS
DIMENSIONS LXWXH (MM)	650 X 400 X 35	550 X 350 X 35	550 X 350 X 35
DISPLAY TECHNOLOGY	IPS TECHNOLOGY WITH LED BACKLIGHT	IPS TECHNOLOGY WITH LED BACKLIGHT	IPS TECHNOLOGY WITH LED BACKLIGHT
RECOMMENDED RESOLUTION (PIXEL)	1920 X 1080	1920 X 1080	1920 X 1080
PICTURE FORMAT	16:9	16:9	16:9
IMAGE SIZE (MM)	597 X 334	510 X 287	475 X 268
LIGHT DENSITY (CD / M ²)	350	300	300
MAX. VIEWING ANGLE H / V (°)	178 / 178	178 / 178	178 / 178
CONTRAST	1000:1	1000:1	5000:1
SWITCHING TIME (MS))	10	10	8
COLORS (MILLIONS)	16,7	16,7	16,7
GRAPHIC INTERFACES	HDMI (ON DEMAND DVI, OR DP)		
POWER SUPPLY EXTERNAL	INPUT VOLTAGE 220-240 V, 50/60 HZ OUTPUT VOLTAGE 24 V		
POWER CONSUMPTION IN OPERATION (WATT)	20	22	20
WEIGHT APPROX. (KG)	8	7,5	7,5
OPERATING TEMPERATURE MIN /MAX (° C)	0 / +50	0 / +50	0 / +60
WARRANTY	36 MONTH ELECTRONICS / MECHANICS LIFE TIME WARRANTY		

OTHER SIZES ON REQUEST

TECHNISCHE DATEN

LOFT MOUNT

SCREEN DIAGONAL	68,6 CM (27") WIDE, FULL HD IPS	58,4 CM (23") WIDE, FULL HD IPS	54,5 CM (21,5") WIDE, FULL HD IPS
DIMENSIONS LXWXH (MM)	650 X 400 X 35	550 X 350 X 35	550 X 350 X 35
DISPLAY TECHNOLOGY	IPS TECHNOLOGY WITH LED BACKLIGHT	IPS TECHNOLOGY WITH LED BACKLIGHT	IPS TECHNOLOGY WITH LED BACKLIGHT
RECOMMENDED RESOLUTION (PIXEL)	1920 X 1080	1920 X 1080	1920 X 1080
PICTURE FORMAT	16:9	16:9	16:9
IMAGE SIZE (MM)	597 X 334	510 X 287	475 X 268
LIGHT DENSITY (CD / M²)	350	300	300
MAX. VIEWING ANGLE H / V (°)	178 / 178	178 / 178	178 / 178
CONTRAST	1000:1	1000:1	5000:1
SWITCHING TIME (MS))	10	10	8
COLORS (MILLIONS)	16,7	16,7	16,7
GRAPHIC INTERFACES	HDMI (ON DEMAND DVI, OR DP)		
POWER SUPPLY EXTERNAL	INPUT VOLTAGE 220-240 V, 50/60 HZ OUTPUT VOLTAGE 12 V		
POWER CONSUMPTION IN OPERATION (WATT)	20	22	20
WEIGHT APPROX. (KG)	8	7,5	7,5
OPERATING TEMPERATURE MIN /MAX (° C)	0 / +50	0 / +50	0 / +60
WARRANTY	36 MONTH ELECTRONICS / MECHANICS LIFE TIME WARRANTY		

OTHER SIZES ON REQUEST

