

FLO EVO

NOVIS
monitors

MOBILE AND PORTABLE BUSINESS MONITOR. FOLDING MONITOR.

PRODUCT FEATURES.

- PREMIUM DESIGN MONITOR MADE OF GLASS AND ALUMINUM IN A MODERN DESIGN
- VERY FLEXIBLE USE DUE TO THE AGILE FOLDING FOOT
- MODEL VARIANTS FOR FIXED INSTALLATION, FOR EXAMPLE AT CONFERENCE TABLES
- ABSOLUTELY PLANE FRONT AND REAR SIDE
- THE MONITOR CAN BE SWIVELED ALMOST 90 °
- BRILLIANT AND CONTRASTIC IMAGE WITH HIGHLY EFFECTIVE REFLECTION
- MAXIMUM ANGLE OF VIEW THROUGH IPS INDUSTRIAL PANEL IN FULLHD
- CONNECTION TO ANY GRAPHICS SYSTEM
- 36 MONTHS WARRANTY, LIFETIME ON FOOT MECHANICS

STANDARD EQUIPMENT.


- FRONT GLASS ESG ANTI-REFLECTIVE
BLACK OR WHITE (RAL 9005 OR 9016)
- MOLDING FRAME, BACKPLATE AND
FOLDING ALUMINUM FOOT GROUND AND
ANODIZED

CONNECTIONS.


- 12 VOLT (POWER SUPPLY EXTERNAL)
- CONNECTION HDMI ON REQUEST DP OR
DVI, BUTTON OSD.
- HIGH QUALITY CABLE IN CARBON LOOK
WITH 2.5 M.

INSTALLATION VARIANTS.

DIFFERENT LEG VARIANTS WITH BRACKETS FOR INTEGRATION AT THE END OF A CONFERENCE TABLE, AT THE WALL OR FOLDABLE IN TABLES.

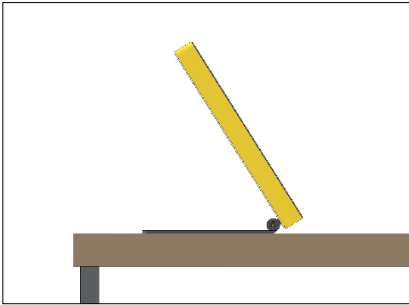

STAND MODEL CLASSIC

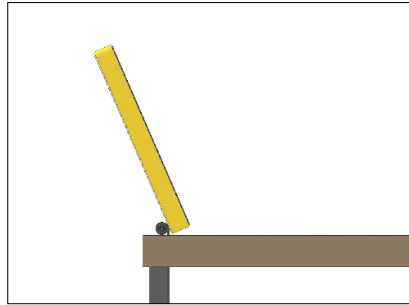

FOLDING FOOT VERTICAL, TABLE SCREWED



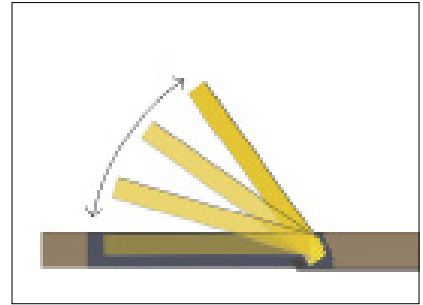



TABLE INSTALLATION SWIVELING

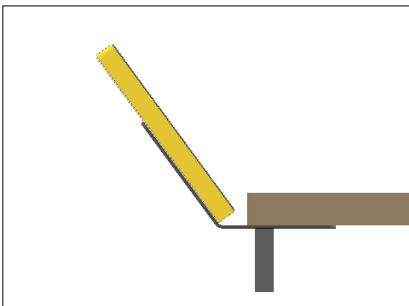


AT THE END OF THE TABLE

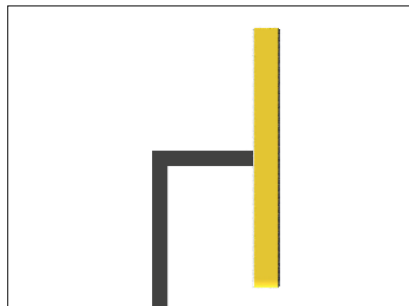


WITH ARM HOLDER

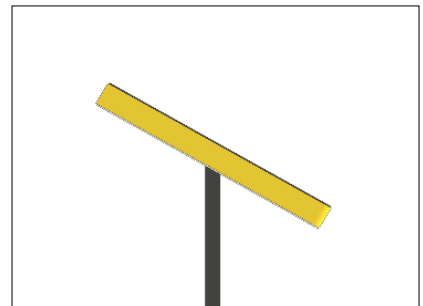


AS A STELE

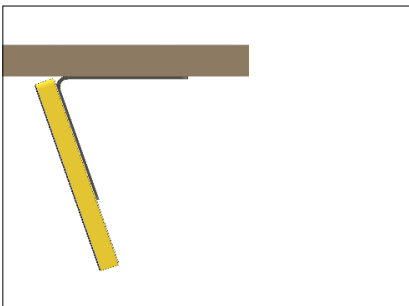

SLOPING CEILING

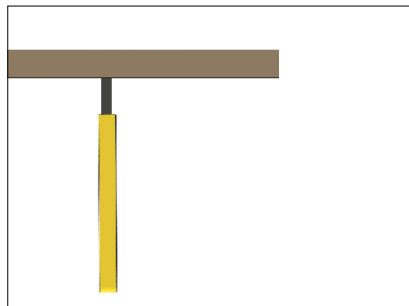

HANGING FROM THE CEILING STRAIGHT

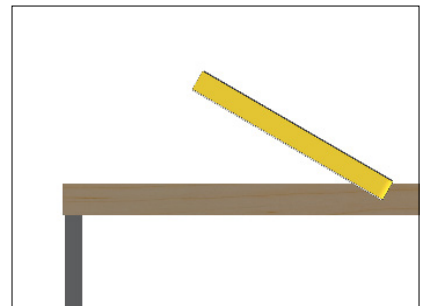

RECESSED IN A SMALL RECESS AND SCREWED

AND MANY MORE POSSIBILITIES

SCREEN DIAGONAL.

27" (68,6 CM)

ONLY WITH VESA BRACKET

21,5" (54,5 CM)

17,3" (43,8 CM)

STANDARD EQUIPMENT.

FRONT GLASS ESG
ANTI-REFLECTIVE
OPTIONAL:



BLACK (RAL 9005)



WHITE (RAL 9016)

ALL-ROUND FRAME, BACK-
SIDE AND FOOT PARTS IN
ALUMINUM
OPTIONAL:



EV1 ANODIZED



BLACK ANODIZED

FIXED CABLE FOR HDMI PICTURE
SIGNAL TRANSFER AND POWER
SUPPLY IN CARBON-LOOK TUBE,
LENGTH APPROX. 2.5 M.



EVEN MORE OPTIONS...

- MANY BUILT-IN VARIANTS AROUND YOUR TABLES
- CONNECTION VARIANTS: DISPLAYPORT (DP), DVI
- MORE CONNECTION VARIANTS (ANALOGUE, ETC.) ON DEMAND
- OPTIONAL HIGH-PRECISION MULTI-TOUCH SYSTEM INTEGRATED IN THE FRONT GLASS
WITH TABLET FEELING .

CONFERENCE



RECEPTION



CONTROL AND
MONITORING



AS WELL AS VARIOUS OTHER AREAS OF APPLICATION

TECHNICAL SPECIFICATIONS

FLO EVO

SCREEN DIAGONAL	68,6 CM (27") WIDE, FULL HD IPS	54,5 CM (21,5") WIDE, FULL HD IPS	44 CM (17,3") WIDE, FULL HD IPS
DIMENSIONS LXWXH (MM)	650 X 400 X 30	550 X 350 X 30	446 X 283 X 25
DISPLAY TECHNOLOGY	IPS TECHNOLOGY WITH LED BACKLIGHT	IPS TECHNOLOGY WITH LED BACKLIGHT	IPS TECHNOLOGY WITH LED BACKLIGHT
RECOMMENDED RESOLUTION (PIXEL)	1920 X 1080	1920 X 1080	1920 X 1080
PICTURE FORMAT	16:9	16:9	16:9
IMAGE SIZE (MM)	597 X 334	477 X 268	382 X 215
LIGHT DENSITY (CD / M ²)	350	300	300
MAX. VIEWING ANGLE H / V (°)	178 / 178	178 / 178	178 / 178
CONTRAST	1000:1	1000:1	700:1
SWITCHING TIME (MS))	10	25	25
COLORS (MILLIONS)	16,7	16,7	16,7
GRAPHIC INTERFACES	HDMI (ON DEMAND DVI, OR DP)		
POWER SUPPLY EXTERNAL	INPUT VOLTAGE 220-240 V, 50/60 HZ OUTPUT VOLTAGE 12 V		
POWER CONSUMPTION IN OPERATION (WATT)	22	20	6
WEIGHT APPROX. (KG)	9,5	7,5	6,5
OPERATING TEMPERATURE MIN /MAX (° C)	0 / +50	0 / +50	0 / +50
WARRANTY	36 MONTH ELECTRONICS / MECHANICS LIFE TIME WARRANTY		

