


LOFT FOLD

NOVIS
monitors

TABLE INTEGRATION IN PERFECTION.

PRODUCT FEATURES.

- RETRACTABLE MONITOR FOR THE FLUSH-MOUNTED INSTALLATION IN CONFERENCE OR RECEPTION
- EASY FOLDING MECHANISM, SWIVEL AND MOVABLE (154° /160 MM)
- UNFOLDED BARELY HIGHER THAN A WATER GLASS
- REPLACEABLE BACK PLATE IN THE TABLE VENEER FROM THE CARPENTER
- BACK PANEL CAN BE FLEXIBLY COVERED WITH VENEER, LEATHER, CORIAN, GLASS, STONE AND PLASTICS
- COVER CAN BE USED AS A MOUSE AND KEYBOARD SHELF
- FURTHER INSTALLATIONS WITH MONITOR LOCATED ON TOP
- BRILLIANT AND CONTRASTIC IMAGE WITH HIGHLY EFFECTIVE REFLECTION
- MAXIMUM ANGLE OF VIEW (H/V 178° DEGREE) THANKS TO IPS INDUSTRIAL PANEL IN FULLHD
- CONNECTION TO ANY GRAPHICS SYSTEM
- 36 MONTHS WARRANTY, LIFETIME ON FOOT MECHANICS

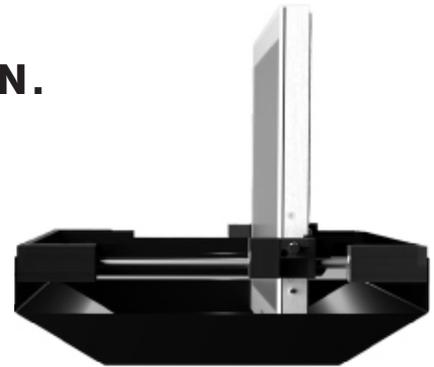

STANDARD EQUIPMENT.

- COLOR FOR ESG GLASS FRONT, REFLECTED BLACK OR WHITE (RAL 9005 OR 9016)
- SIDE BARS ALUMINUM GRINDED AND BLACK ANODIZED
- IPS INDUSTRIAL PANEL IN 1,920 X 1,080 DPI (LONG TERM AVAILABLE)
- COVERING PAN IN 9005 BLACK

CONNECTIONS.

- 12 VOLT (EXTERNAL POWER SUPPLY)
- CONNECTION HDMI ON REQUEST DP OR DVI, OSD BUTTON
- CABLE LENGTH 2.5 M.


UNFOLDED.

- HARDLY NOTICEABLE
- ERGONOMICALLY ADJUSTABLE



COLLAPSED.

- INVISIBLE
- TABLE SURFACE FREELY USABLE

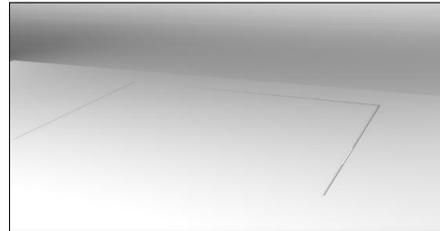

BILDSCHIRMDIAGONALE.

27" (68,6 CM)

23.X" (58,4 CM)

17,3" (43 CM)

STANDARD EQUIPMENT.

FRONT GLASS ESG
ANTI-REFLECTIVE
OPTIONAL:



BLACK (RAL 9005)



WHITE (RAL 9016)

ALL-ROUND FRAME, BACK-
SIDE AND FOOT PARTS IN
ALUMINUM
OPTIONAL:




EV1 ANODIZED



BLACK ANODIZED

FIXED CABLE FOR HDMI PICTURE
SIGNAL TRANSFER AND POWER
SUPPLY IN CARBON-LOOK TUBE,
LENGTH APPROX. 2.5 M.



EVEN MORE OPTIONS...

- MULTI-TOUCH SYSTEM WITH TABLET FEELING INTEGRATED IN THE FRONT GLASS
- VIEW AND DISCRETION PROTECTION (PREVENTS VIEWS FROM THE SIDE FROM AN ANGLE OF 30 °)
- BACK COVERED WITH LEATHER

CONFERENCE AND
MEETING ROOMS



LISTED AREAS



RECEPTION AND
SERVICE DESKS



AS WELL AS VARIOUS OTHER AREAS OF APPLICATION

TECHNICAL SPECIFICATIONS

LOFT FOLD

SCREEN DIAGONAL	68,6 CM (27") WIDE, FULL HD IPS	58,4 CM (23.X") WIDE, FULL HD IPS	44 CM (17,3") WIDE, FULL HD IPS
DIMENSIONS LXWXH (MM)	650 X 400 X 30	550 X 350 X 30	418 X 278 X 27
DISPLAY TECHNOLOGY	IPS TECHNOLOGY WITH LED BACKLIGHT	IPS TECHNOLOGY WITH LED BACKLIGHT	IPS TECHNOLOGY WITH LED BACKLIGHT
RECOMMENDED RESOLUTION (PIXEL)	1920 X 1080	1920 X 1080	1920 X 1080
PICTURE FORMAT	16:9	16:9	16:9
IMAGE SIZE (MM)	597 X 334	510 X 287	382 X 215
LIGHT DENSITY (CD / M ²)	350	300	300
MAX. VIEWING ANGLE H / V (°)	178 / 178	178 / 178	178 / 178
CONTRAST	1000:1	1000:1	700:1
SWITCHING TIME (MS))	10	25	25
COLORS (MILLIONS)	16,7	16,7	16,7
GRAPHIC INTERFACES	HDMI (ON DEMAND DVI, OR DP)		
POWER SUPPLY EXTERNAL	INPUT VOLTAGE 220-240 V, 50/60 HZ OUTPUT VOLTAGE 12 V		
POWER CONSUMPTION IN OPERATION (WATT)	22	20	6
WEIGHT APPROX. (KG)	8	7,5	6,5
OPERATING TEMPERATURE MIN /MAX (° C)	0 / +50	0 / +50	0 / +50
WARRANTY	36 MONTH ELECTRONICS / MECHANICS LIFE TIME WARRANTY		

MORE SIZES ON REQUEST

